



TECHNICAL NOTICE

ligateam 6

Additional features

ligateam 6

Dimensions : L 154 x H 38 x P 108 mm
 Weight : 250 g
 Operating temperature range : 5°C to 45°C
 Storage temperature range : -20°C to +70°C

Power supply unit


Nominal input voltage : 100 - 220 V
 Nominal input current : maximum 0,5 A
 Mains frequency : 50 - 60 Hz
 Nominal output voltage : 15 V
 Nominal output current : 1,2 A
 Operating temperature range : +5°C to +45°C
 Storage temperature range : -20°C to +70°C
 Relative humidity operation : 20% to 85%
 Relative humidity storage : 20 % to 95 %
 Weight : approximatively 150 g

ligateam 6 - Monaural, binaural DECT headsets All brands - T Version


- RJ9 : blue
- RJ11 : green
- RJ45 : red



Extension ligateam 10,14,18 base stations

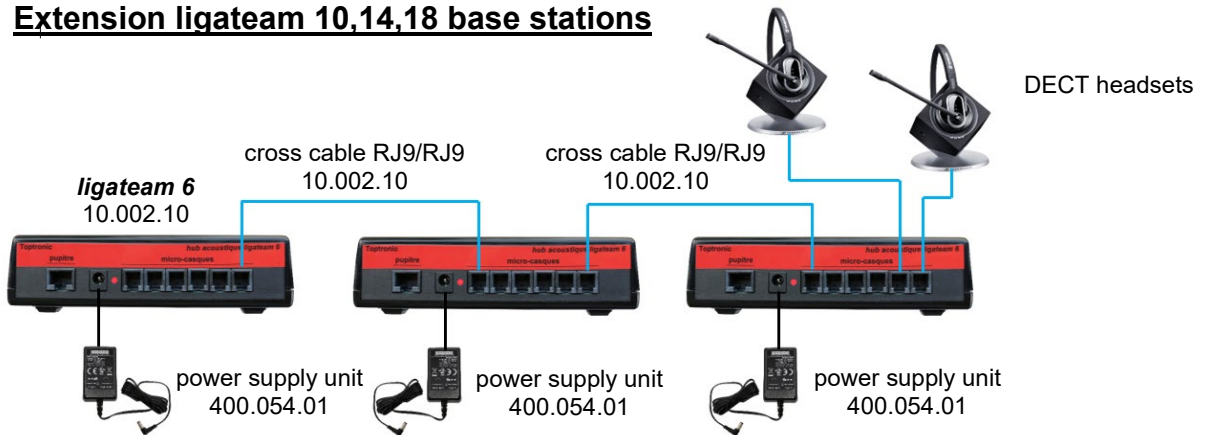


Recording - Broadcast

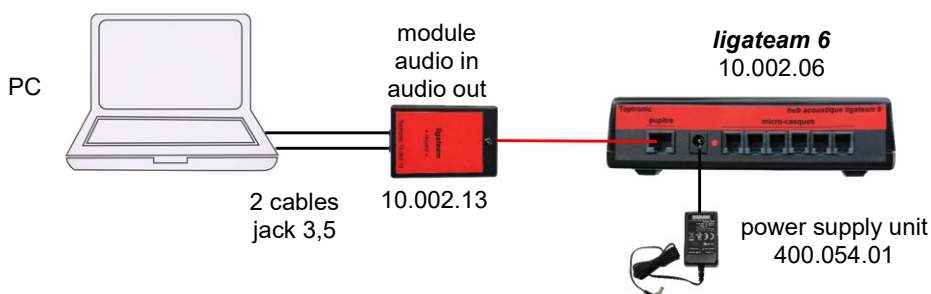


Conference listening on loudspeaker


- RJ9 : blue
- RJ11 : green
- RJ45 : red

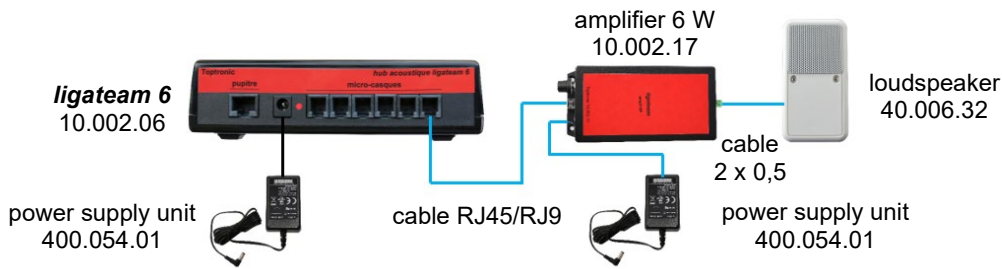

Drive dialogue

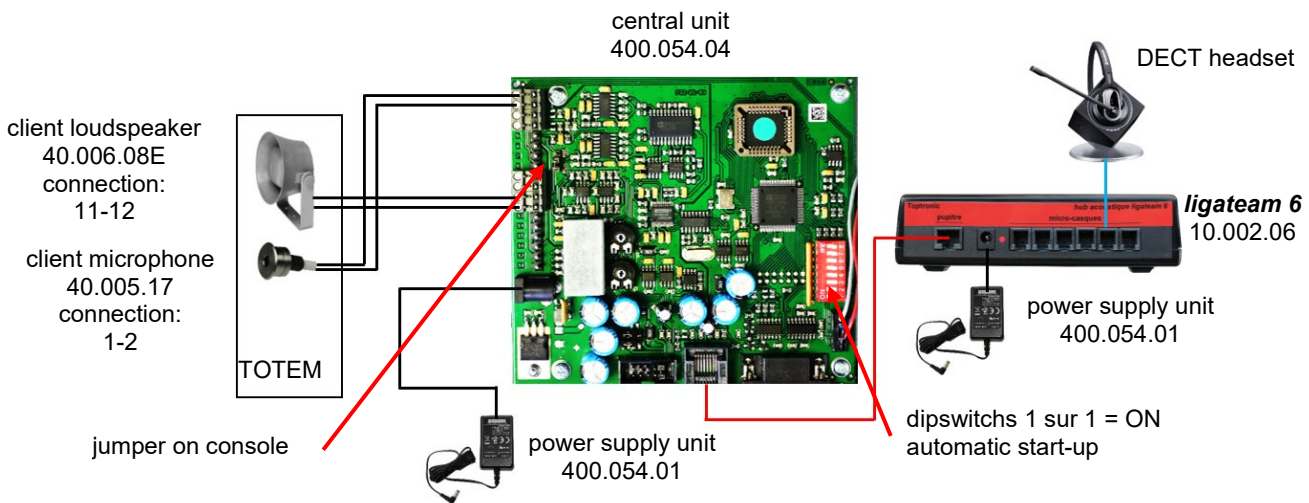

Telephone conference of the whole group

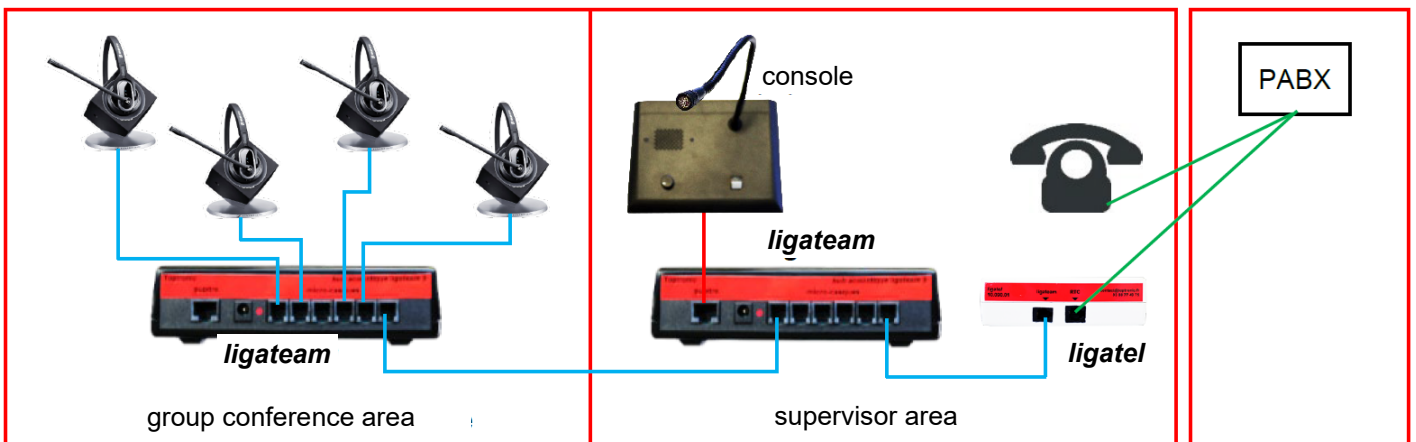

TOPTRONIC

11 rue du Tanin
 BP 60052
 67382 LINGOLSHEIM CEDEX
 Tél : 03 88 77 49 75
 Fax : 03 88 77 49 77
 e-mail : contact@toptronic.fr
 http://www.toptronic.fr